



世界品质 浙江制造



立信微信公众平台

立信阀门集团有限公司 LIXIN VALVE GROUP CO.,LTD.

地址：浙江省永嘉县瓯北城市新区东瓯工业区（安丰工业区）舟山路

Add: Zhoushan Rd, Dong'ou Industrial Zone(An'feng), Oubei District, Yongjia County, Zhejiang Province.

邮编/PC: 325102

电话/Tel: +86-577-67325555

传真/Fax: +86-577-67965550

邮箱/E-mail: 67325555@cnlxv.com

www.cnlxv.com


重要事项:

图示尺寸与实物尺寸可能略有差异，本生产商有权修改或取消上述产品，恕不另行通知。若使用过期或作废的图纸，本生产商将不负任何责任。

NOTICE:

These measurements are subject to change or cancellation, no responsibility is assumed for use of superseded or voided pages.

© 立信阀门集团（LIXIN）2016版权所有 采用生态纸印刷

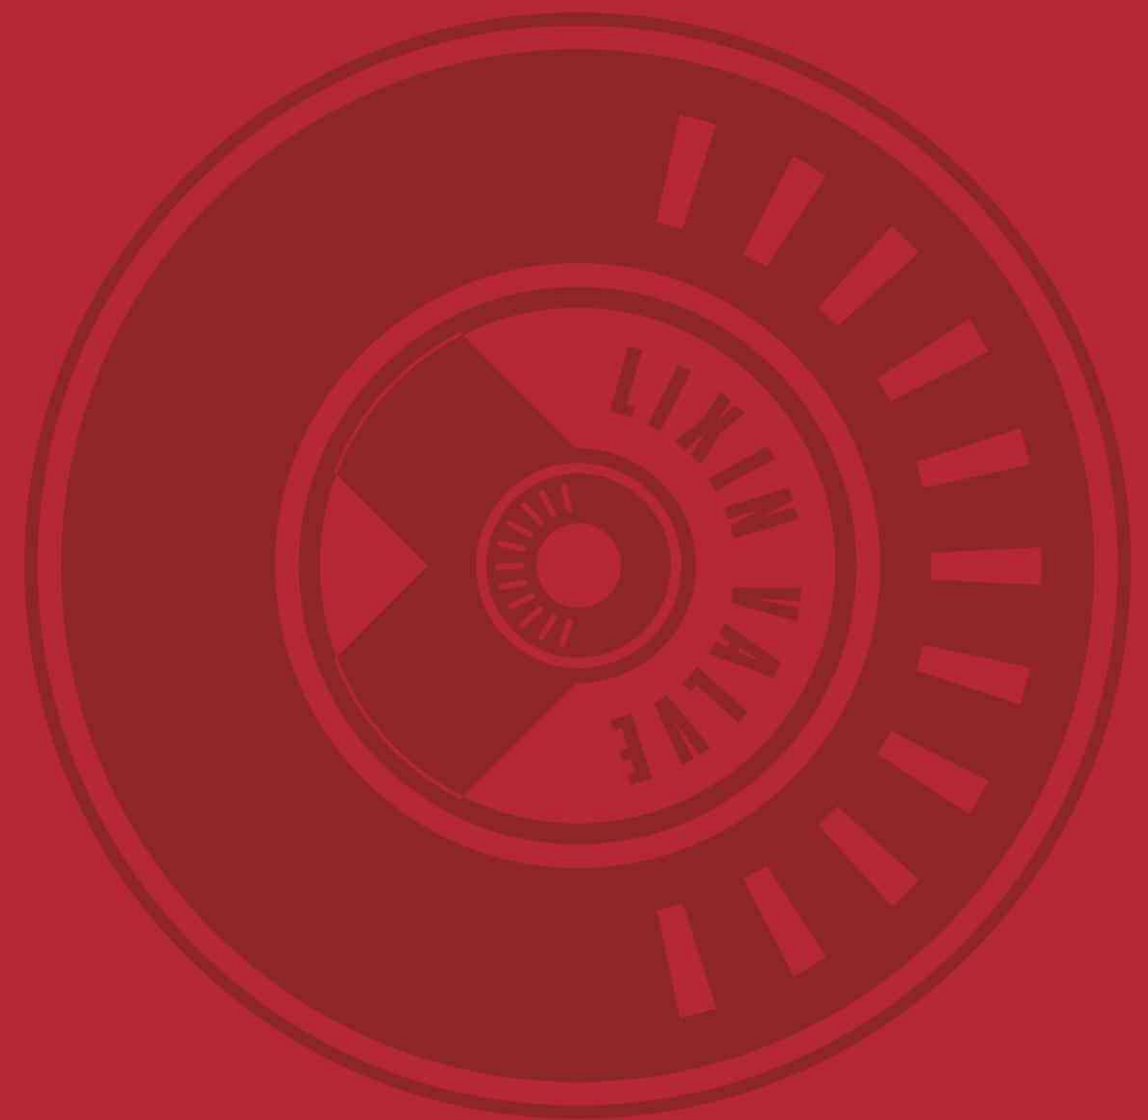

中国·立信阀门集团
CHINA LIXIN VALVE GROUP



立足阀门市场 信守质量承诺
INTEGRITY LET US ROOT IN THE VALVE WORLD



CHAIRMAN'S STATEMENT

董事长致辞

立信，立足阀门市场，信守质量承诺。

集团始终坚持“以人为本、真诚服务、以质兴企、科技创新”的企业经营理念，向国内外广大用户提供优质产品和精良服务，是立信十几年发展历程中始终奉行的根本原则。

今天的立信将不断迎着各种机遇与挑战；不断吸收先进的理念；不断提高规范的管理；不断持续改进与创新；不断提升产品的技术含量与品质；不断完善优质的服务来回报我们的广大用户。

我们非常重视科技的革新与投入，重视人才的引进，让各种人才都有施展才华的舞台，欢迎各界有识之士加盟我们共同的事业。力争使立信阀门成为国际阀门行业的知名品牌。

在此，谨向多年来关心和支持我们事业的社会各界朋友致以衷心的感谢！热忱欢迎国内外各界朋友携手合作，共创辉煌！

LIXIN VALVE GROUP CO., LTD. (Integrity let us root in the valve world.)

We always adhere to the business philosophy 'People-oriented, sincere service, high quality enterprise, scientific and technology innovation'. Providing high quality products and superior services to the masses of users at home and abroad, we always adhere to it as fundamental principle, during our 10 years' development history.

Today, LIXIN is facing a variety of opportunities and challenges, absorbing advanced concept, improving the standardized management, keeping improving and innovating, improving the technology content and quality of products, improving the quality of service to our customers in return, constantly.

We attach great importance not only to the innovation and investment of science and technology, but also to the introduction of talents. Suppling a stage to each kind of talent to showing their brilliance. We warmly welcome people of insight from all walks of life to join us. Let's try our best to make LIXIN become a famous brand in the international valve industry.

Hereby, we would like to take this opportunity to express my sincere thanks to the friends from all works of life for your care and support. Looking forward to cooperating with you and creating brilliant achievements!

立信阀门集团董事长：
LIXIN Valve Group Chairman: Qi' nai Wang

China Lixin Valve Group
www.cnlxv.com

企业篇 01-06

Enterprise Chapter

董事长致辞 / Chairman's Statement

书写传奇 / Writing legend

关于立信 / About LIXIN

以“信”为本的经营 / Integrity Based Business

07-14 品质篇

Quality Chapter

荣誉与资质 / Honor and qualification

装备精益求精，品质尽善尽美 / Better Equipment Perfect Quality

专注，只为无与伦比的品质 / Focus only for unparalleled quality

视角因您而不同 / Perspective different because of you

15-16 团队篇

Team Chapter

尊重个性，感受不同的工作团队

Respect individuality

Experience Different Work Teams

市场篇 17-18

Market Chapter

动力支持 为您保驾护航

Power Support, To serve you

业绩篇 19-20

Performance Chapter

工程案例

Projects

寄语篇 41-42

Message Chapter

社会责任

Social Responsibility

产品篇 21-40

Product Chapter

浆阀系列 / Slurry valve series

Y型料浆阀及放料阀系列 / Discharge valve series

不锈钢阀门系列 / Stainless steel valves series

球阀系列 / Ball valve series



CONTENTS

目录



WRITING LEGEND

书写传奇



- 12月份创立了永嘉县瓯北立信阀门厂; **1999**

In Dec.1999, OUBEI LIXIN VALVE FACTORY was established.
- 3月份经申请升为永嘉县立信阀门厂, 注册资金50万元; **2000**

In Mar.2000, its name was changed into YONGJIA COUNTY LIXIN VALVE FACTORY, registered capital was RMB500,000.00;
- 10月份企业以股份制形式升为永嘉立信阀门制造有限公司, 注册资金从50万元增加到508万元; **2003**

12月份注册资金从508万元增加到778万元;

In Oct.2003,its name was changed into YONGJIA LIXIN VALVE MANUFACTURING CO.,LTD, registered capital increased to RMB5,080,000.00;

In Dec.2003,the registered capital increased to RMB7,780,000.00;
- 9月份迁入自建的千石工业区占地面积为3000平方、建筑面积为4000平方的新厂房; **2005**

10月份公司投入开发了《刀形浆料闸阀》、《暗杆刀闸阀》等2项新产品, 并获得实用新型专利;

In Sept. 2005,it moved to Qianshi Industrial Zone new plant which is built by Lixin, covering floor area of 3000m² and structure area of 4000m²;

In Oct.2005,knife slurry gate valve and bonneted knife gate valve were awarded CERTIFICATE OF UTILITY MODEL PATENT;
- 2006年公司开发了Y型料浆阀生产车间, 高性能的设备投入, 并进行设备更新. 注册资金从778万元增至3000万元; **2006**

2006年12月份通过ISO9001质量体系认证. 同时董事长王启耐被推选为永嘉县人大代表;

In 2006, Y Type Discharge Valve Workshop was established, registered capital was increased from RMB 7,780,000 to RMB 30,000,000;

In Dec.2006,it passed the certification of ISO9001 Quality Management System;
- 2007年4月份取得《中华人民共和国特种设备制造许可证》TS(A1)许可证; 先后通过美国石油API 6D、欧盟PED(CE)等认证; **2007**

2007年10月份公司被推荐为温州泵阀协会会员单位、中国工程建设推荐产品、中国燃气协会会员;

2007年11月份在浙江省云和县, 创办了云和立信泵阀制造有限公司(铸件生产基地);

In Apr.2007,it got TS(A1)-Manufacture Licence, API 6D, CE certification, etc;

In Oct.2007,it was recommended as CHINA PROJECT CONSTRUCTION recommended product and a member of CHINA GAS ASSOCIATION etc;

In Nov.2007,it established YUNHE LIXIN PUMP&VALVE MANUFACTURING CO., LTD.(CASTING MANUFACTURING BASE);
- 2008年11月份我集团吸收兼并5家阀门子公司升格为立信阀门集团, 注册资金达到5328万元; **2008**

2008年12月份获得永嘉县名牌商标、中石化成员单位;

2008年我集团投入开发了《刀形浆料闸阀》、《暗杆刀型闸阀》等2项新产品, 并获得实用新型专利;

In Nov.2008,we incorporated 5 valve companies into LIXIN VALVE GROUP,registered captial increased to RMB53,280,000.00;

In Dec.2008,awarded as YONGJIA FAMOUS BRAND,member of SINOPEC;

In 2008,our knife slurry gate valve and bonneted knife gate valve were awarded CERTIFICATE OF UTILITY MODEL PATENT again;
- 2009年我集团被评为永嘉县名星企业、温州市名牌产品、永嘉县诚信民营企业、中国阀门协会会员单位、得到温州市技术监督局 **2009**

标准化和计量两项水平的确认;

2009年我集团投入开发了《轨道旋塞阀》, 获得永嘉县重大科技项目补助15万元, 实施后验收获得科技成果;

2009年我集团完成了年产2000吨V型球阀项目技改和V型球阀车间的扩建, 同年董事长被评为优秀企业家;

In 2009,our group was awarded as YONGJIA STAR ENTERPRISE, a member of CHINA VALVE ASSOCIATION etc;

In 2009,we developed orbit plug valve and the result was fruitful;

In 2009,we finished the workshop enlargement and technology reform of year production 2000 tons V Type Ball Valves;
- 2010年我集团获得高新技术企业、浙江省区域名牌产品、永嘉县名星企业、永嘉县诚信民营企业; **2010**

永嘉县研发中心、永嘉县劳动A类企业, 获得科技成果一项、美国石油API 6D、欧盟PED(CE)等认证复审;

2010年10月份我集团投入开发了《升降杆式波纹管球阀》, 获得永嘉县重大科技项目补助15万元, 实施后验收获得科技成果;

2010年11月份我集团获得了《粉料专用阀》、《耐磨陶瓷刀形闸阀》、《Y型料浆阀》、《Y型料浆阀》等实用新型专利, 同年董事长被评为优秀企业家;

In 2010,our group was awarded as HIGH AND NEW TECHNOLOGY ENTERPRISE, ZHEJIANG PROVINCE REGIONAL FAMOUS PRODUCT etc;

In Oct.2010,we developed lift type bellow sealed ball valve, and the result was fruitful;

In Nov.2010,we were awarded CERTIFICATE OF UTILITY MODEL PATENT of Powder Specialty Valve, Wearable Ceramic Knife Gate Valve, Non-Rising Stem Knife Gate Valve etc;
- 2011年我集团被评为永嘉县巨龙企业、永嘉县信用管理示范企业、永嘉县十佳典范企业、《中华人民共和国特种设备制造许可证》TS复审; **2011**

2011年10月份我集团投入开发了《耐磨陶瓷刀形闸阀》, 获得永嘉县重大科技项目补助15万元, 实施后验收获得科技成果;

2011年11月份我集团获得了《衬聚氨酯耐磨刀形闸阀》、《V型球阀》、《Y型球阀》、《Y型料浆阀》等实用新型专利, 同年董事长被评为优秀企业家;

2011年我集团又在千石工业区老厂边上扩建: 占地面积为4000平方, 建筑面积为7000平方的新厂房;



Brief Introduction

企业简介

立信阀门集团有限公司，是国家级无区域集团，座落在“中国泵阀之乡”——浙江省永嘉县瓯北东瓯工业区舟山路，是一家集阀门研发、生产、销售及服务于一体化的现代化企业，公司始建于2000年，自创建以来技术不断创新，规模日益壮大。2008年在浙江立信阀门有限公司基础升格为立信阀门集团有限公司，集团注册资金2.88亿元，下辖五个子公司，其中拥有云和铸造生产基地，总建筑面积达50000平方米，现有员工450人，其中高中级工程技术人员50多人，大专以上学历150多人，拥有数控加工中心、各种大中型设备、光谱仪等专用检测设备共460台套，年生产能力达20000吨。

集团有健全质量管理体系，先后通过了ISO9001、ISO14001、OHSAS18001体系认证；并通过美国石油学会API 6D企业认证，API607、6FA、624经TUV产品认证、ISO15848-1试验经TUV认证，欧共体CE认证等；取得国家特种设备制造许可（压力管道）TS（A1）证书，获得35项国家专利，高新技术企业，标准起草单位，浙江省著名商标，浙江省技术研发中心，浙江省信用管理示范企业，浙江省区域名牌产品，浙江省科技型中小企业，浙江省名牌产品，温州市名牌产品，温州市红十字会博爱功勋奖，温州市高成长企业，永嘉县巨龙企业，永嘉县领军企业，永嘉县县长质量奖，永嘉县十佳诚信典范企业，银行资信AAA级单位；集团系中石化供应商网络成员单位，中国海油采办业务系统成员单位、中国华电集团公司集团级供应商会员，中油中泰燃气投资集团市场准入单位，中国化工装备总公司定点生产企业单位，国家工程建设推荐产品单位，中国燃气协会会员单位，国家电力配件供应网络成员单位。

集团现产品种类有通用阀门、特种阀门、非标阀门与阀门配件等四大系列，并广泛应用于石油、化工、电力、矿山、冶金、钢铁、选煤、氧化铝、造纸、制药、污水处理等行业，产品远销东南亚、中东、欧洲、南美、非洲等世界各地，深受国内外广大用户的赞誉，并与建立了长期稳定的合作关系。

集团始终坚持“以人为本、真诚服务、以质兴企、科技创新”的企业经营理念，以市场需求为导向，为开拓全球阀门市场，打造立信阀门品牌，振兴民族工业发展，热忱欢迎国内外各界朋友携手合作，共创辉煌！



As a non-regional group company, located in 'China Pump&Valve Town' Zhoushan Road Dongou industrial, Oubei Town, Yongjia Country, Zhejiang Province, Lixin Valve Group Co., Ltd. is a modern enterprise specialized in research, development, production, sales and service of valves since 2000, it was upgraded to a group company of China from Zhejiang Lixin Valve Co., Ltd. in 2008, with 288 million CNY registered capital and 5 branch companies (include manufacturing base Yunhe foundry). We owned up to 50000m², intermediate engineers and more than 150 college or above staffs. We have high precise numerical control processing center, with more than 460 sets of all kinds large&medium special measurement equipment, and over 20000 tons annual output.

We have integrated quality management system, and have passed ISO9001, ISO14001, OHSAS18001 System Certification, also have the American Petroleum Institute API 6D certification, API 607, 6FA, 624 certified product by TUV, ISO15848-1 test certified by TUV (no fine leak), European Union CE certification, national special equipment manufacturing license (pressure pipes) TS (A1) certificates, and 35 national utility new model patents, New High-tech Enterprise, Standards Drafting Enterprise, Famous Trademark of Zhejiang Province, Technology R & D Center of Zhejiang Province, Credit Management Model Enterprise of Zhejiang Province, Area Famous Brand Products of Zhejiang province, Technology Small and mid-sized Enterprise of Zhejiang province, Famous Brand products of Zhejiang Province, Famous Brand Product of Wenzhou City, Wenzhou Red Cross Boai Meritorious Award, High-growth Enterprise of Wenzhou, Dragon Enterprise of Yongjia Country, Leading Enterprise of Yongjia, Mayor

Quality Award of Yongjia, Top ten Integrity Model Enterprise of Yongjia Country, Bank credit grade AAA company. We are member of the suppliers network of Sinopec suppliers, China Huadian Corporation, acquisition business system of CNOOC, Group-Lever supplier member of China Huadian Corporation Group-level supplier member; The market access unit of CNPC Zhongtai Gas Investment Group; The designated production enterprise of China National Chemical Equipment Corporation; the product recommended enterprise of the National Engineering Construction, a member of China Gas Association, a member of the fittings supply network of State Grid.

Now we have 4 major product categories, including General Industrial Valves, Special Valves, Non-standard Valves and Fittings. Products are widely used in such industries as petroleum, petrochemical industry, electric power, mining, metallurgy, paper making, pharmacy, aluminum oxide and sewage treatment etc. Furthermore, the products have been sold far to Southeast Asia, Oceania, Mideast, Europe, North/South America and Africa with clients' praise, and got long-term stable cooperators and agents all over the world.

We always adhered to the business philosophy 'people-oriented, Sincere Service, High Quality Enterprise, Scientific and Technological Innovation'. Regarding market demands as guider, to expand the global valve market, to create brand Lixin Valve, to promote the development of national industry, warmly welcome friends from all over the world work together to create brilliant!





ENTERPRISE CULTURE

企业文化

/发展战略目标

开拓全球阀门市场，打造立信阀门卓越品牌，振兴中华民族工业发展

/Development Strategy and Target

Expand the global valve market, build excellent brand Lixin Valve, revitalize and develop Chinese national industry.

/企业精神

诚信、团队、学习、创新

/Spirit of Enterprise

Integrity, Team, Learning, Innovation.

/经营理念

以人为本、真诚服务、以质兴企、科技创新

/Business Concept

People oriented, sincere service, high quality enterprise, scientific and technical innovation.

/经营方针

立足阀门市场 信守质量承诺

/Management Policy


Integrity let us root in the valve world.

/工作准则

思想—目标—思路—方法—氛围—效率—效果

/Working Guideline

Thought – Target – The way of thinking – Methods – Atmosphere – Efficiency – Effect.

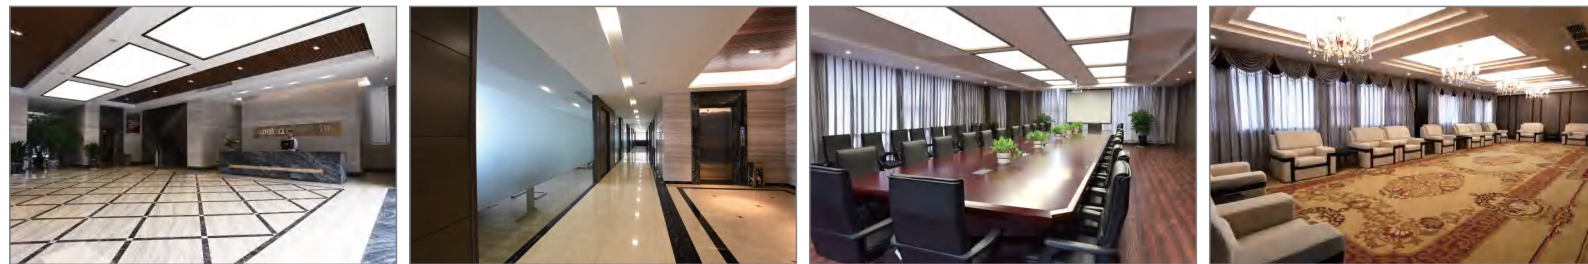

In 2011,our group was awarded as YONGJIA COUNTY TOP 50 ENTERPRISE;
In Oct.2011,we developed wearable ceramic knife gate valve, and the result was fruitful;
In Nov.2011,we were awarded CERTIFICATE OF UTILITY MODEL PATENT of PU Lined Wearable Knife Gate Valve, V Type Ball Valve, Y Type Discharge Valve, Y Type Slurry Valve etc;
In 2011,we enlarged the Qianshi Industrial old plant, the enlarged new one covers 4000 m² area;

2011

2012年我集团被评为永嘉县巨龙企业，永嘉县信用管理示范企业，永嘉县专利示范企业；
2012年10月份我集团投入开发了《氧化铝专用阀》，获得永嘉县重大科技项目补助18万元，实施后验收获得科技成果；
2012年11月份我集团获得了《高压刀型闸阀》、《耐磨闸阀》等实用新型专利；同年董事长被评为优秀企业家；同时注册资金从5328万元增资到8328万元；
2012年我集团购买了位于东瓯工业区舟山路，占地面积18000平方，建筑面积2万平方的新厂区；

2012




BETTER EQUIPMENT PERFECT QUALITY

装备精益求精，品质尽善尽美

立信的成功在于不仅仅注重表面的完美，更加追求细节的精致。立信对每一个产品都进行严格的检测。检测员高度负责的用心溶于每一个部件中，加上最先进的检测设备和严格的科学化管理，使每一个生产的产品经得住顾客的精心挑选。立信人庄严承诺让每一个生产产品都达到出厂标准。这正是立信产品得以畅销的秘诀所在。

LIXIN's success is based on perfect appearance as well as delicate particulars of products. LIXIN is strict in testing each product. The high responsible of inspector is dissolved to every component, and the most advanced testing equipment and strict scientific management, to make every product endure customer's picking. LIXIN human promises every product leaving factory is eligible. That is the secret of salable for LIXIN product.

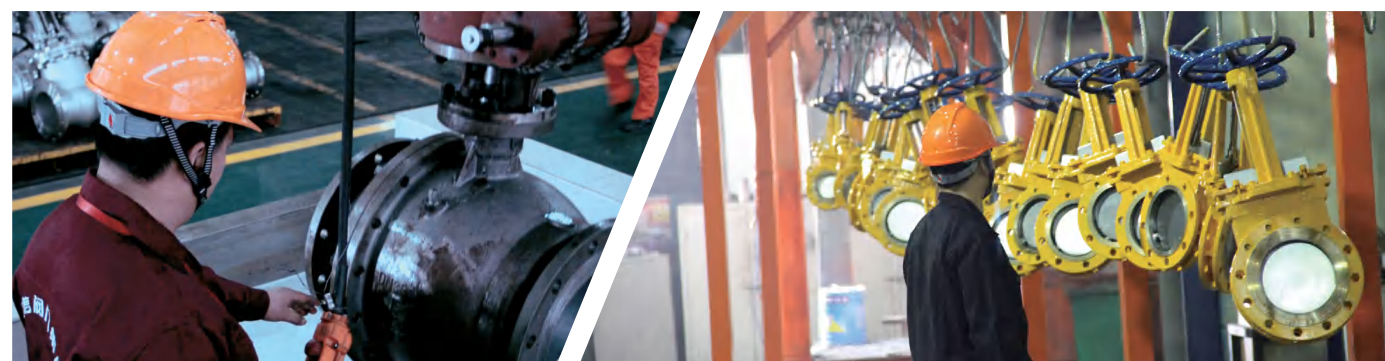

2013年3月份我集团顺利通过了高新技术企业复审，安全生产标准化验收，获得温州市知名商标、永嘉县巨龙企业、永嘉县信用管理示范企业；
2013年10月份我集团获得了《制糖专用球阀》、《浮动式高性能蝶阀》等实用新型专利，参与起草《放料用截止阀》、《无阀盖刀形闸阀》等二项国家标准实施；
2013年董事长被评为永嘉县优秀企业家，浙江省中小企业优秀企业家，3月份注册资金从8328万元增资到12800万元；
2013年2月份我集团从永嘉县千石工业区乔迁至永嘉县东瓯工业区舟山路的新厂区；



FOCUS ONLY FOR UNPARALLELED QUALITY

专注，只为无与伦比的品质

除了精益求精的专业能力和无与伦比的创新理念外，立信严格的质量管理体系确保每一台产品达到国际水平，这使立信成为众多客户最值得依赖的合作伙伴。

不断地以客户满足为标准，努力使客户感到满意，从设计到生产都严格遵循ISO的生产管理系统，把产品质量问题控制在生产线上，同时，立信引进了金相显微镜、光谱分析仪、超声波探伤等各种仪器和试验检测设备与专业的质量检验人员，设立了进货检验、过程检验、最终检验三大检验步骤和理化室、计量室、质量记录档案室三大质量机构，全面且准确地了解并控制了产品的质量。

质量管理体系的有效运行依赖于员工的技能和态度，员工的正确操作才能保障系统的有效运行，通过行之有效的培训系统，我们完全相信自己员工的能力，员工是改善质量的源泉。立信不断鼓励员工提出建议，执行有建设性的想法，帮助改善生产流程，实现品质的改善。ISO18001职业安全体系能够为员工创造更好的工作环境，将帮助生产更高质量的产品。

立信先后通过ISO9001体系认证、ISO14001体系认证、美国石油学会API认证、欧共体CE认证等；2007年取得国家特种设备制造许可（压力管道）TS证书，并获得十八项国家实用新型专利。

Besides the more and more excellent professional ability and unparalleled innovative ideas, Lixin strict quality management system to ensure every product to meet international standards, which makes Lixin become the most trustworthy partner of many customers .

Constantly take customer's satisfaction as the standard. From design to production, we strictly follow the ISO production management system, control quality in the production line. At the same time, Lixin introduced microscope, spectrometer, ultrasonic testing and other various instruments and test equipment, and professional quality inspection personnels. Establish the three test procedures, including incoming inspection, process inspection, final inspection. And establish physical and chemical room, measuring rooms, the quality recording room. Comprehensive and accurately understand and control the quality of the products.

The effective operation of the quality management system depends on the employee's skills and attitudes. Employee's correct operation will ensure effective operation of system. Through effective training system, we have full confidence of their ability. Employees are the source of quality improvement. Lixin continues to encourage employees to make recommendations, adopt the good ideas to help improve production processes to achieve quality improvement. ISO18001 occupational safety system to create a better working environment for our employees, will help produce higher quality products.

Lixin has passed ISO9001, ISO14001, API , CE certification. In 2007 obtain the national special equipment manufacturing license (pressure pipe) TS Certificate and eighteen national utility model patents



In Mar.2013,our group was awarded as WENZHOU CITY FAMOUS BRAND and YONGJIA COUNTY TOP 50 ENTERPRISE etc;
 In Oct.2013, we were awarded CERTIFICATE OF UTILITY MODEL PATENT of Sugar Specialty Ball Valve,Floating High Performance Butterfly Valve etc;
 In Mar.2013,the registered capital increased to RMB128,000,000.00;
 In Feb.2013,we moved to new plant in Zhoushan Road,Dongou Industrial Zone,Yongjia County from Qianshi Industrial Zone of Yongjia County;



PERSPECTIVE DIFFERENT, BECAUSE OF YOU

视角，因您而不同

立信集团专注于阀门及相关产品的设计与生产，并致力于将全球先进的流体控制解决方案带给客户，为客户创造更多价值。立信不仅仅限于提供一个性能可靠的设备，更多的是充分考虑适用性和经济及节能运行的解决方案。将科技最前沿的技术融入到设计的产品中，加速行业进步和技术变革，让更多的用户得到适合自己需求的解决方案，更注重可持续长远发展和伙伴的长期关系。

Lixin Group focused on valves, related products design and production, and is committed to bring the global advanced fluid control solutions to customers and create more value for customers.

Lixin is not only provide a good quality equipment, but also consider the applicability, economic and energy-saving operation solutions. To bring the most cutting-edge technology into the design of products, accelerate the industry progress and technological change, that more users get suitable solutions and focusing more on sustainable development and long-term partners relationship.



企业成为中国石化烟气脱硫脱硝项目国产化项目的框架协议供货商。
企业被评为永嘉县巨龙企业，永嘉县品牌管理突出贡献奖，获得“温州市名牌”“浙江省著名商标”“浙江省信用管理示范企业”等荣誉。



RESPECT INDIVIDUALITY EXPERIENCE DIFFERENT WORK TEAMS

尊重个性，感受不同的工作团队

好的环境会为高品质的产品提供基础，
优秀的团队是我们可靠的保证，
良好的培训是企业发展的动力，
企业的发展为大家共同创造美好生活！
吐纳百川，荟萃精华。无论是博士、硕士及高级管理人员，还是战斗在生产、销售、科研、服务一线，用自己勤劳的双手，发挥自己聪明才智，不断开创立信事业的普通工人、管理人员、营销人员、普通科研工作者，都同样是立信不断发展、不可或缺的优秀人才。
立信注重员工的自我成长，愿意为他们提供良好的工作环境，认同效率和尊重个性。除了对员工的完善培训计划，也注重聘请外部专家和内部交流，更愿意提供更好的舞台，立信国际化资源也给员工更大的舞台。

Good environment will provide the basis for high-quality products,
Excellent team is our reliable guarantee.
Good training is the power of development,
Enterprise development and jointly create a better life for everyone!
Lixin focus on employees self-growth, we are willing to provide a good working environment for them, efficiency recognition and respect for individuality. In addition to the training programs for employees, we also pay attention to invite external experts and internal communications, and more willing to provide a better stage, Lixin international resources also give staff a bigger stage.



朝气蓬勃的团队 不拘一格纳人才
Energetic team is satisfied of talent



In 2014, Our group has become the framework agreement supplier for the localization project of Sinopec flue gas desulfurization and denitrification project. Our group was awarded as DRAGON ENTERPRISE OF YONGJIA COUNTY, YONGJIA COUNTY BRAND MANAGEMENT OUTSTANDING CONTRIBUTION AWARD, and won the honor of WENZHOU FAMOUS BRAND, ZHEJIANG FAMOUS TRADEMARK and ZHEJIANG CREDIT MANGEMENT DEMONSTRATION ENTERPRISE.



POWER SUPPORT, TO SERVE YOU

动力支持，为您保驾护航

立信认为，完善的售后服务，才会为产品打造提供生命力。面对竞争日益激烈的全球市场，除了提供高品质的产品外，高效的服务也是必不可少的。服务精神贯穿了立信的整个生产交付过程，我们信守承诺，不仅仅提供产品和解决方案。

立信服务中心一直为您开启，多个服务网点和售后服务工程师随时待命。更多的时候，我们为您而想。

Lixin believes that improve the service will provide vitality to products. Faced with an increasingly competitive global market, in addition to providing high-quality products, efficient service is essential. Service spirit through the Lixin whole production and delivery process, we abide by commitments, and provide products and solutions.

Lixin service center always waiting for you.



全球受经济危机的影响，对于我国各行各业经济发展的影响非常严重，我们公司各项经济指标增长率历年最低的一年，销售收入较上年仅增长3.5%；但在全体员工齐心协力的努力下，公司取得了一定科研荣誉，获得《浙江省研发中心》，开发的三项新产品获得实用新型专利，并获得《温州红十字会博爱功勋奖》，公司被评为永嘉县《巨龙企业》，董事长被评为永嘉县“杰出企业家”称号，企业信用等级“AAA”。




PROJECTS

工程案例

立信产品应用于造纸、糖业、氧化铝、矿业、石油、天然气、化工、电力、污水等行业。凭借其优秀的品质和质量保障，得到客户的好评和赞誉。

LIXIN products used in papermaking, sugar, aluminum, mining, oil and gas, chemicals, power, sewage and other industries. With its excellent quality and quality assurance, it get the praise from the customers.

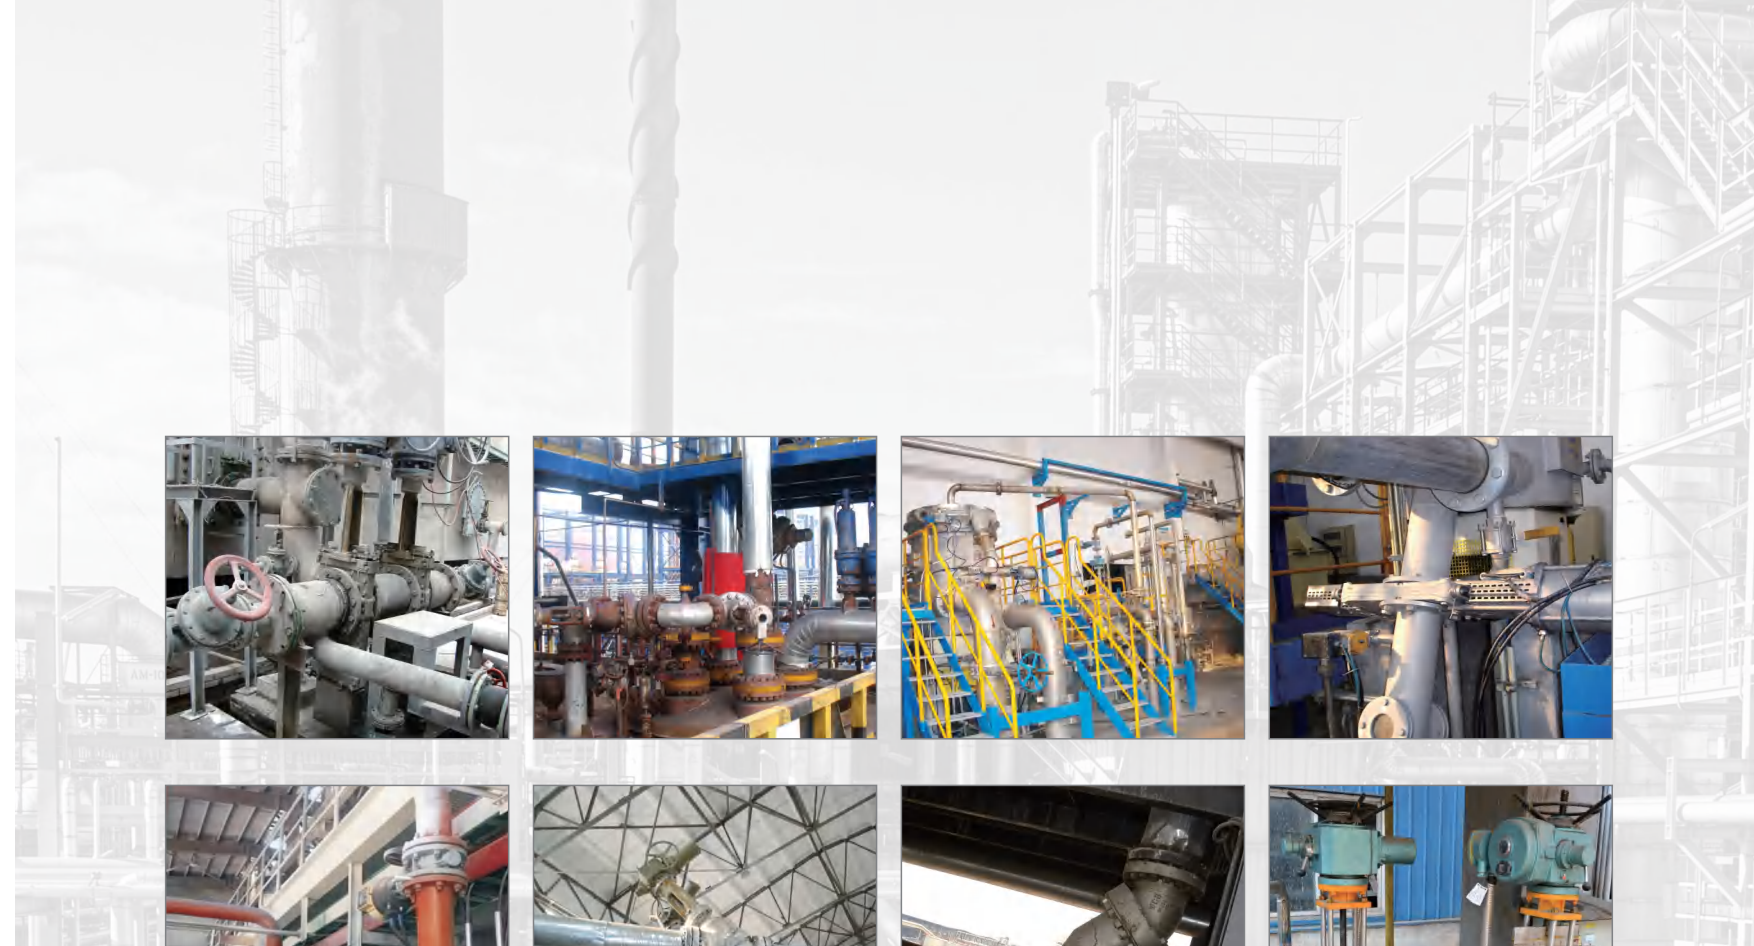

In 2015, The global impact of the economic crisis has had a serious impact on the economic development of all walks of life in China. The growth rate of our economic indicators has been the lowest in the past years, and the sales revenue has only increased by 3.5% compared with the previous year. However, under all employees' effort, the company has obtained some scientific research honors and obtained the ZHEJIANG R&D CENTER. Three new products developed and obtained utility model patents. Won the WENZHOU RED CROSS BO'AI GONGXUN AWARD. The company was awarded as DRAGON ENTERPRISE OF YONGJIA COUNTY. The chairman was awarded the Outstanding Entrepreneur in Yongjia County. The enterprise credit rating "AAA".

SLURRY VALVE SERIES

浆闸阀系列

立足阀门市场 信守质量承诺
Integrity Let Us Root In The Valve World



SLURRY VALVE SERIES 浆闸阀系列



凸耳式刀闸阀系列

LUG Type Knife Gate Valve Series

(PZ43)

公称压力: 0.6MPa、1.0MPa、1.6MPa、2.5MPa、150Lb
公称通径: DN50~2000 NPS 2"~80"
适用温度: -30~+1100°C (具体温度范围视密封副材质和介质性质而定)
连接法兰: GB/T 9113、GB/T 17241.6、JB/T 79、ANSI B 16.5、ANSI B16.47、HG、JIS、DIN等
主体材料: C.I、WCB、ZG0Cr18Ni9、ZG1Cr18Ni12Mo2Ti、CF8、CF8M、CF3、CF3M、0Cr25Ni20、904L等
密封形式: 硬密封、软密封
泄 漏 量: 硬密封: D级 (液体0.1XDN mm³/s) 软密封: A级(零泄漏)
配套附件: 安装法兰
驱动装置: 手动、伞齿轮、气动、电动、电液动、链轮等。
Nominal pressure: 0.6MPa、1.0MPa、1.6MPa、2.5MPa、150Lb
Nominal diameter: DN50~2000 NPS 2"~80"
Suitable temperature: -30~+1100°C (temperature range subject to the material of sealing and the property of medium)
Connecting flange: GB/T 9113、GB/T 17241.6、JB/T79、ANSI B 16.5、ANSI B16.47、HG、JIS、DIN, etc.
Main material: C.I、WCB、ZG0Cr18Ni9、ZG1Cr18Ni12Mo2Ti、CF8、CF8M、CF3、CF3M、0Cr25Ni20、904L, etc.
Seal type: metal seat、soft seat.
Leakage: metal seat: class D(liquid 0.1XDN mm³/s) soft seat: class A(zero leakage)
Accessories: flange
Actuator: handwheel, bevel gear, pneumatic, electric, electric/hydraulic, chain wheel, etc.

圆法兰刀型闸阀系列

Round Flange Type Knife Gate Valve Series

(PZ73)

公称压力: 0.6MPa、1.0MPa、1.6MPa、2.5MPa、150Lb
公称通径: DN50~2000 NPS 2"~80"
适用温度: -30~+1100°C (具体温度范围视密封副材质和介质性质而定)
连接法兰: GB/T 9113、GB/T 17241.6、JB/T 79、ANSI B16.5、ANSI B16.47、HG、JIS、DIN等
主体材料: C.I、WCB、ZG0Cr18Ni9、ZG1Cr18Ni12Mo2Ti、CF8、CF8M、CF3、CF3M、0Cr25Ni20、904L等
密封形式: 硬密封、软密封
泄 漏 量: 硬密封: D级 (液体0.1XDN mm³/s) 软密封: A级 (零泄漏)
配套附件: 安装法兰
驱动装置: 手动、伞齿轮、气动、电动、电液动、链轮等。
Nominal pressure: 0.6MPa、1.0MPa、1.6MPa、2.5MPa、150Lb
Nominal diameter: DN50~2000 NPS 2"~80"
Suitable temperature: -30~+1100°C (temperature range subject to the material of sealing and the property of medium)
Connecting flange: GB/T 9113、GB/T 17241.6、JB/T79、ANSI B 16.5、ANSI B16.47、HG、JIS、DIN, etc.
Main material: C.I、WCB、ZG0Cr18Ni9、ZG1Cr18Ni12Mo2Ti、CF8、CF8M、CF3、CF3M、0Cr25Ni20、904L, etc.
Seal type: metal seat、soft seat.
Leakage: metal seat: class D(liquid 0.1XDN mm³/s) soft seat: class A(zero leakage)
Accessories: flange
Actuator: handwheel, bevel gear, pneumatic, electric, electric/hydraulic, chain wheel, etc.



顺利通过了高新技术复审, ISO14001、ISO9001和OHSAS18001三项体系复审;
旋塞阀取得了API6FA防火认证,《脱硝脱硝专用刀形闸阀》项目列入省高新技术产品备案;
获得实用新型专利三项,参加起草行业标准一项《氧化铝专用料浆阀》。
公司被评为永嘉县《巨龙企业》,董事长被评为永嘉县“杰出企业家”称号,企业信用等级“AAA”。



SLURRY VALVE SERIES 浆闸阀系列



暗板带盖刀型闸阀系列 (PFZ73) Bonnet Type Knife Gate Valve Series

公称压力: 0.6MPa、1.0MPa、1.6MPa、2.5MPa、150Lb
公称口径: DN50~2400 NPS 2"~96"
适用温度: -30~+1100°C (具体温度范围视密封副材质和介质性质而定)
连接法兰: GB/T 9113、GB/T 17241.6、JB/T 79、ANSI B 16.5、ANSI B16.47、HG、JIS、DIN等
主体材料: C.I、WCB、ZG0Cr18Ni9、ZG1Cr18Ni12Mo2Ti、CF8、CF8M、CF3、CF3M、0Cr25Ni20、904L等
密封形式: 硬密封、软密封
泄 漏 量: 硬密封:D级(液体0.1XDN mm³/s)软密封: A级(零泄漏)
配套附件: 安装法兰
驱动装置: 手动、伞齿轮、气动、电动、电液动、链轮等。

Nominal pressure: 0.6MPa、1.0MPa、1.6MPa、2.5MPa、150Lb
Nominal diameter: DN50~2400 NPS 2"~96"
Suitable temperature: -30~+1100°C (temperature range subject to the material of sealing and the property of medium)
Connecting flange: GB/T 9113、GB/T 17241.6、JB/T79、ANSI B 16.5、ANSI B16.47、HG、JIS、DIN, etc.
Main material: C.I、WCB、ZG0Cr18Ni9、ZG1Cr18Ni12Mo2Ti、CF8、CF8M、CF3、CF3M、0Cr25Ni20、904L, etc.
Seal type: metal seat、soft seat.
Leakage: metal seat: class D(liquid 0.1XDN mm³/s) soft seat: class A(zero leakage)
Accessories: flange
Actuator: handwheel, bevel gear, pneumatic, electric, electric/hydraulic, chain wheel, etc.



SLURRY VALVE SERIES 浆闸阀系列



烟气脱硫脱硝刀型闸阀系列 (PFZ73X₂) Desulfurization and Denitrification Knife Type Gate Valve Series

公称压力: 0.6MPa、1.0MPa、1.6MPa、2.5MPa、150Lb
公称口径: DN50~1000 NPS 2"~40"
适用温度: -30~+200°C (具体温度范围视密封副材质和介质性质而定)
连接法兰: GB/T 9113、JB/T 79、ANSI B 16.5、ANSI B16.47、HG、JIS、DIN等
主体材料: WCB、ZG0Cr18Ni9、ZG1Cr18Ni12Mo2Ti、CF8、CF8M、CF3、CF3M等
密封形式: 软密封
泄 漏 量: A级(零泄漏)
配套附件: 安装法兰
驱动装置: 手动、伞齿轮、气动、电动、电液动、链轮等。

Nominal pressure: 0.6MPa、1.0MPa、1.6MPa、2.5MPa、150Lb
Nominal diameter: DN50~1000 NPS 2"~40"
Suitable temperature: -30~+200°C (temperature range subject to the material of sealing and the property of medium)
Connecting flange: GB/T 9113、JB/T 79、ANSI B 16.5、ANSI B16.47、HG、JIS、DIN, etc.
Main material: WCB、ZG0Cr18Ni9、ZG1Cr18Ni12Mo2Ti、CF8、CF8M、CF3、CF3M, etc.
Seal type: soft seat.
Leakage: class A(zero leakage)
Accessories: flange
Actuator: handwheel, bevel gear, pneumatic, electric, electric/hydraulic, chain wheel, etc.

气动长插板阀系列 (SCZ73F) Pneumatic Through Conduit Knife Gate Valve Series

公称压力: 0.6MPa、1.0MPa、1.6MPa
公称口径: DN50~700
适用温度: -30~+200°C
连接法兰: GB/T 9113、JB/T 79、HG/T 20592
主体材料: WCB、ZG1Cr18Ni9Ti、ZG1Cr18Ni12Mo2Ti、CF8、CF8M、CF3、CF3M等
密封形式: 软密封
泄 漏 量: A级(零泄漏)
配套附件: 安装法兰
驱动装置: 手动、伞齿轮、气动、电动、电液动等。

Nominal pressure: 0.6MPa、1.0MPa、1.6MPa
Nominal diameter: DN50~700
Suitable temperature: -30~+200°C
Connecting flange: GB/T 9113、JB/T 79、HG/T 20592
Main material: WCB、ZG1Cr18Ni9Ti、ZG1Cr18Ni12Mo2Ti、CF8、CF8M、CF3、CF3M etc.
Seal type: soft seat.
Leakage: class A (zero leakage)
Accessories: flange
Actuator: handwheel, bevel gear, pneumatic, electric, electric/hydraulic, etc



铸铁刀形闸阀系列 (WPZ73X) Cast Iron Knife Gate Valve Series

公称压力: 0.6MPa、1.0MPa、1.6MPa、2.5MPa、150Lb
公称口径: DN50~1000 NPS 2"~40"
适用温度: -30~+350°C (具体温度范围视密封副材质和介质性质而定)
连接法兰: GB/T 17241.6、JB/T 78、JIS、DIN等
主体材料: 灰铸铁、球墨铸铁
密封形式: 硬密封、软密封
泄 漏 量: 硬密封: D级(液体0.1XDN mm³/s) 软密封: A级(零泄漏)
配套附件: 安装法兰
驱动装置: 手动、伞齿轮、气动、电动、电液动、链轮等。

Nominal pressure: 0.6MPa、1.0MPa、1.6MPa、2.5MPa、150Lb
Nominal diameter: DN50~1000 NPS 2"~40"
Suitable temperature: -30~+350°C (temperature range subject to the material of sealing and the property of medium)
Connecting flange: GB/T 17241.6、JB/T 78、JIS、DIN, etc.
Main material: cast iron, ductile iron etc.
Seal type: metal seat、soft seat.
Leakage: metal seat: class D(liquid 0.1XDN mm³/s) soft seat: class A (zero leakage)
Accessories: flange
Actuator: handwheel, bevel gear, pneumatic, electric, electric/hydraulic, chain wheel, etc



In 2016, successfully passed the HIGH-TECH ENTERPRISE re-evaluation, ISO14001, ISO9001 and OHSAS18001 review. The plug valve obtained the API6FA fire certification. The project Desulfurization and Denitrification Special Knife Gate Valve is listed in the provincial high-tech product record. Obtained three utility model patent, participated drafting an industry standard "Alumina-specific Slurry Valve". The company was rated as DRAGON ENTERPRISE OF YONGJIA COUNTY, and the chairman was awarded Outstanding Entrepreneur of Yongjia County. The enterprise credit rating "AAA".



SLURRY VALVE SERIES 浆闸阀系列



内衬聚氨酯刀形闸阀系列 Lined Polyurethane Knife Gate Valve Series (NCPZ73DX)

公称压力: 0.6MPa、1.0MPa、1.6MPa、150Lb
公称口径: DN50~600 NPS 2"~24"
使用温度: -30~+100℃ (具体温度范围视填料材料和介质性质而定)
连接法兰: GB/T 9113、GB/T 17241.6、JB/T 79、ANSI B 16.5、HG、JIS、DIN等
主体材料: C.I、WCB、CF8、CF8M、CF3、CF3M等
密封形式: 聚氨酯阀座圈 (DN50-DN600) 聚氨酯内衬套 (DN50~DN500)
泄漏量: 聚氨酯密封; 驱动装置: 手动、伞齿轮、气动、液动、电动。

Nominal pressure: 0.6MPa, 1.0MPa, 1.6MPa, 150Lb
Nominal diameter: DN50~600 NPS 2"~24"
Suitable temperature: -30~+100℃ (temperature range subject to the packing material and the property of medium)
Connecting flange: GB/T 9113, GB/T 17241.6, JB/T 79, ANSI B 16.5, HG, JIS, DIN, etc.
Main material: C.I, WCB, CF8, CF8M, CF3, CF3M, etc.
Seal type: polyurethane seat ring (DN50-DN600) polyurethane inner liner (DN50~DN500)
Leakage: polyurethane seal
Actuator: handwheel, bevel gear, pneumatic, hydraulic, electric, etc.

陶瓷密封刀形闸阀系列 Ceramic Seal Knife Gate Valve Series (PZ73TC)

公称压力: 0.6MPa、1.0MPa、1.6MPa、150lb
公称口径: DN50~800 NPS 2"~32"
使用温度: -30~+250℃ (具体温度范围视填料材料和介质性质而定)
连接法兰: GB/T 9113、JB/T 79、ANSI B 16.5、ANSI B16.47、HG、JIS、DIN等
主体材料: WCB、CF8、CF8M、CF3、CF3M等
密封形式: 陶瓷阀座圈 (DN50-DN500)、阀门流道口粘贴陶瓷片 (DN500-DN800)、阀门流道口喷陶瓷 (DN50-DN800)
泄 漏 量: 陶瓷硬密封: 不做阀座密封测试, 颗粒状物体不会泄漏。
驱动装置: 手动、伞齿轮、气动、电动、电液动、链轮等。

Nominal pressure: 0.6MPa, 1.0MPa, 1.6MPa, 150Lb
Nominal diameter: DN50~800 NPS 2"~32"
Suitable temperature: -30~+250℃ (temperature range subject to the packing material and the property of medium)
Connecting flange: GB/T 9113, JB/T 79, ANSI B 16.5, ANSI B16.47, HG, JIS, DIN, etc.
Main material: WCB, CF8, CF8M, CF3, CF3M, etc.
Seal type: ceramic seat ring (DN50-DN500), valve channel stick with ceramic chap (DN500-DN800), valve channel spray ceramic (DN50-DN800).
Leakage: ceramic metal seat: not do seal test, grain will not leak.
Actuator: handwheel, bevel gear, pneumatic, electric, electric/hydraulic, chain wheel, etc.



SLURRY VALVE SERIES 浆闸阀系列



衬胶刀形闸阀系列 Rubber Lined Knife Gate Valve Series (CJPZ73X-10C)

公称压力: 1.0MPa、1.6MPa、150Lb
公称口径: DN50~600 NPS 2"~24"
适用温度: ≤200℃
连接法兰: GB/T 9113、JB/T 79、ANSI B16.5、HG等
主体材料: WCB
密封形式: 软密封
泄漏量: A级 (零泄漏)
配套附件: 安装法兰
驱动装置: 手动、伞齿轮、电动等

Nominal pressure: 1.0 MPa, 1.6 MPa, 150 lb
Nominal diameter: DN50~600 NPS 2"~24"
Suitable temperature: ≤200℃
Connecting flange: GB/T 9113, JB/T 79, ANSI B16.5, HG, etc.
Main material: WCB
Seal type: soft seat
Leakage: class A (zero leakage)
Accessories: flange
Actuator: handwheel, bevel gear, electric, etc.

衬氟刀型闸阀系列 Fluorine Plastic Lined Knife Gate Valve Series (PZ73F46)

公称压力: 1.0MPa、1.6MPa、150Lb
公称口径: DN50~600 NPS 2"~24"
适用温度: ≤100℃
连接法兰: GB/T 9113、JB/T 79、ANSI B16.5、HG等
主体材料: WCB+F46
密封形式: 软密封全内衬F46
泄漏量: A级 (零泄漏)
配套附件: 安装法兰
驱动装置: 手动、伞齿轮、电动等

Nominal pressure: 1.0 MPa, 1.6 MPa, 150 lb
Nominal diameter: DN50~600 NPS 2"~24"
Suitable temperature: ≤100℃
Connecting flange: GB/T 9113, JB/T 79, ANSI B16.5, HG, etc.
Main material: WCB+F46
Seal type: soft seat
Leakage: class A (zero leakage)
Accessories: flange
Actuator: handwheel, bevel gear, electric, etc.



是接受严峻挑战和考验的一年,公司在董事长狠抓机遇、顽强进取的带领下,各项经济主要指标均达到了历史最好水平。销售收入较上年增长35%,同时顺利通过了API复审,球阀取得了API6FA防火认证,获使用新型专利三项;并获得《浙江省名牌产品》,永嘉县《县长质量奖》,永嘉县《巨龙企业》,董事长被评为永嘉县“杰出企业家”称号,企业信用等级“AAA”。



SLURRY VALVE SERIES 浆闸阀系列



矿浆阀系列 (ZSK) Slurry Valve Series

公称压力: 1.6~6.4MPa、150Lb、300Lb、400Lb
公称口径: DN50~600 NPS 2"~24"
适用温度: -29~+150℃(具体温度范围视壳体材质和介质性质而定)
连接法兰: GB/T 9113、JB/T 79、ANSI B16.5、HG、JIS、DIN等
主体材料: WCB、ZG0Cr18Ni9、ZG1Cr18Ni12Mo2Ti、CF8、CF8M、CF3、CF3M等
密封形式: 软密封
泄 漏 量: A级(零泄漏)
配套附件: 安装法兰
驱动装置: 手轮、伞齿轮、电动等。

Nominal pressure: 1.6~6.4MPa, 150Lb, 300Lb, 400Lb
Nominal diameter: DN50~600 NPS 2"~24"
Suitable temperature: -29~+150℃ (temperature range subject to the body material and the property of medium)
Connecting flange: GB/T 9113, JB/T 79, ANSI B16.5, HG, JIS, DIN, etc.
Main material: WCB, ZG0Cr18Ni9, ZG1Cr18Ni12Mo2Ti, CF8, CF8M, CF3, CF3M, etc.
Seal type: soft seat.
Leakage: class A(zero leakage)
Accessories: flange
Actuator: handwheel, bevel gear, electric, etc.

浆液阀系列 (Z73X) Slurry Valve Series

公称压力: 0.6MPa、1.0MPa、1.6MPa
公称口径: DN50~1000
适用温度: -15~+200℃
连接法兰: GB/T 9113、GB/T 17241.6、JB/T 79等
主体材料: HT250、WCB、CF8等
密封形式: 软密封
泄 漏 量: A级(零泄漏)
配套附件: 安装法兰
驱动装置: 手动、伞齿轮、气动、电动、电液动、链轮等。

Nominal pressure: 0.6MPa, 1.0MPa, 1.6MPa
Nominal diameter: DN50~1000
Suitable temperature: -15~+200℃
Connecting flange: GB/T 9113, GB/T 17241.6, JB/T 79, etc.
Main material: HT250, WCB, CF8 etc.
Seal type: soft seat.
Leakage: class A(zero leakage)
Accessories: flange
Actuator: handwheel, bevel gear, pneumatic, electric, electric/hydraulic, chain wheel, etc.



SLURRY VALVE SERIES 浆闸阀系列



暗杆刀型闸阀系列 (PZ75) Non-rising Stem Knife Gate Valve Series

公称压力: 0.6MPa、1.0MPa、1.6MPa、2.5MPa、150Lb
公称口径: DN50~1600 NPS 2"~64"
适用温度: -30~+1100℃ (具体温度范围视密封副材质和介质性质而定)
连接法兰: GB/T 9113、GB/T 17241.6、JB/T79、ANSI B 16.5、ANSI B16.47、HG、JIS、DIN等
主体材料: C.I、WCB、ZG0Cr18Ni9、ZG1Cr18Ni12Mo2Ti、CF8、CF8M、CF3、CF3M、0Cr25Ni20、904L等
密封形式: 硬密封、软密封
泄 漏 量: 硬密封: D级(液体0.1XDN mm³/s) 软密封:A级(零泄漏)
配套附件: 安装法兰
驱动装置: 手动、伞齿轮、气动、电动、电液动等。

Nominal pressure: 0.6MPa, 1.0MPa, 1.6MPa, 2.5MPa, 150Lb
Nominal diameter: DN50~1600 NPS 2"~64"
Suitable temperature: -30~+1100℃ (temperature range subject to the material of sealing and the property of medium)
Connecting flange: GB/T 9113, GB/T 17241.6, JB/T79, ANSI B 16.5, ANSI B16.47, HG, JIS, DIN, etc.
Main material: C.I, WCB, ZG0Cr18Ni9, ZG1Cr18Ni12Mo2Ti, CF8, CF8M, CF3, CF3M, 0Cr25Ni20, 904L, etc.
Seal type: metal seat, soft seat.
Leakage: metal seat: class D(liquid 0.1XDN mm³/s) soft seat: class A (zero leakage)
Accessories: flange
Actuator: handwheel, bevel gear, pneumatic, electric, electric/hydraulic, etc.

陶瓷双闸板闸阀系列 (Z644TC) Ceramic Double Disc Gate Valve Series

公称压力: 1.0MPa
公称口径: DN50~300
适用温度: ≤250℃
连接法兰: GB/T 9113、JB/T 79、HG等
主体材料: WCB
密封形式: 陶瓷密封
泄漏量: 按JB/T 10529的规定
配套附件: 安装法兰
驱动装置: 气动
可选气动附件: 1、二位五通电磁阀 2、空气过滤器 3、行程开关

Nominal pressure: 1.0MPa
Nominal diameter: DN50~300
Suitable temperature: ≤250℃
Connecting flange: GB/T 9113, JB/T 79, HG, etc.
Main material: WCB
Seal type: ceramic seal
Leakage: according to JB/T 10529
Accessories: flange
Actuator: pneumatic
Optional pneumatic accessories:
1. the two positions five-ways solenoid valve 2. air filter 3. limit switches



In 2017, It is a year of accepting severe challenges and tests. Under the leadership of the chairman, the major economic indicators have reached the best level in history. The sales revenue increased by 35% compared with the previous year. At the same time, the API review was successfully passed. The ball valve obtained the API6FA fire safe certification. Awarded three new patents. It also won the ZHEJIANG FAMOUS BRAND PRODUCT and the YONGJIA COUNTY MINISTER QUALITY AWARD, DRAGON ENTERPRISE OF YONGJIA COUNTY, the chairman was awarded as Outstanding Entrepreneur of Yongjia County. The enterprise credit rating "AAA".

DISCHARGE VALVE SERIES

Y型料浆阀及放料阀系列

立足阀门市场 信守质量承诺
Integrity Let Us Root In The Valve World



DISCHARGE VALVE SERIES Y型料浆阀及放料阀系列



Y型 料浆阀系列 (Js45Y) Y Type Slurry Valve Series


公称压力: 1.6~16.0MPa、150Lb、300Lb、400Lb、600Lb、900Lb
公称口径: DN50~700 NPS 2"~28"
适用温度: -29~+425℃(具体温度范围视壳体材质和介质性质而定)
连接法兰: GB/T 9113、JB/T 79、ANSI B 16.5、ANSI B16.47、HG、JIS、DIN等
主体材料: WCB
密封形式: 硬密封
泄 漏 量: 无可见泄漏
配套附件: 安装法兰
驱动装置: 手动、伞齿轮、气动、电动等。

Nominal pressure: 1.6~16.0MPa、150Lb、300Lb、400Lb、600Lb、900Lb
Nominal diameter: DN50~700 NPS 2"~28"
Suitable temperature: -29~+425℃ (temperature range subject to the body material and the property of medium)
Connecting flange: GB/T 9113、JB/T 79、ANSI B 16.5、ANSI B16.47、HG、JIS、DIN, etc.
Main material: WCB
Seal type: metal seat
Leakage: no visible leakage
Accessories: flange
Actuator: handwheel, bevel gear, pneumatic, electric, etc

平底放料阀系列 (Fb45Y) Flat Bottom Discharge Valve Series

公称压力: 1.6~16.0MPa、150Lb、300Lb、400Lb、600Lb、900Lb
公称口径: DN50~700 NPS 2"~28"
适用温度: -29~+425℃(具体温度范围视壳体材质和介质性质而定)
连接法兰: GB/T 9113、JB/T 79、ANSI B 16.5、ANSI B16.47、HG、JIS、DIN等
主体材料: WCB
密封形式: 硬质合金密封、喷涂碳化钨 或 喷涂镍基合金
泄 漏 量: 无可见泄漏
配套附件: 安装法兰
驱动装置: 手动、伞齿轮、气动、电动等。

Nominal pressure: 1.6~16.0MPa、150Lb、300Lb、400Lb、600Lb、900Lb
Nominal diameter: DN50~700 NPS 2"~28"
Suitable temperature: -29~+425℃ (temperature range subject to the body material and the property of medium)
Connecting flange: GB/T 9113、JB/T 79、ANSI B 16.5、ANSI B16.47、HG、JIS、DIN, etc.
Main material: WCB
Seal type: hard alloy sealing, spraying tungsten carbide or spraying nickel based alloys
Leakage: no visible leakage
Accessories: flange
Actuator: handwheel, bevel gear, pneumatic, electric, etc

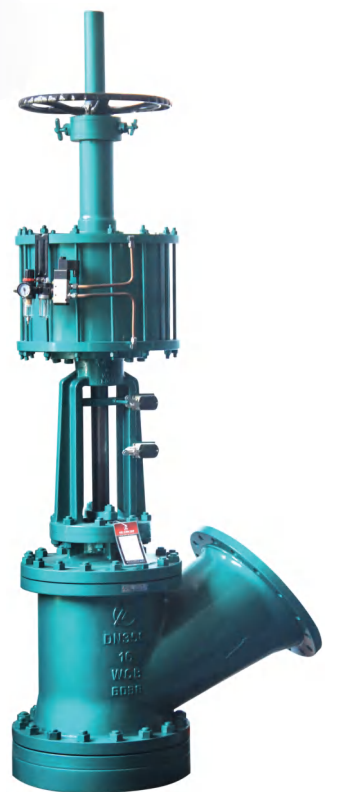

经过这一年的锤炼, 我们的战略更加聚焦, 思路更加明晰, 在董事长很抓机遇和顽强进取的带领下, 各项主要指标增长又一次达到了历史最好水平, 销售收入较上年增长38%, 税收首超1000万元, 同时被列入浙江省“隐形冠军”培育企业, 获得发明专利2项; 《一种缓冲功能内置的平衡阀》和《水量调节阀》、实用新型专利三项; 并获得永嘉县《巨龙企业》、《高成长企业》、《领军企业》, 董事长被评为永嘉县“杰出企业家”称号, 企业信用等级保持“AAA”, 并顺利通过《三体系》换证和中石化《法人信用》等认证。



DISCHARGE VALVE SERIES Y型料浆阀及放料阀系列



管接放料阀系列 (Fg45Y) Pipe Connection Discharge Valve Series

公称压力: 1.6~16.0MPa、150Lb、300Lb、400Lb、600Lb、900Lb
公称口径: DN50~700 NPS 2"~28"
适用温度: -29~+425℃ (具体温度范围视壳体材质和介质性质而定)
连接法兰: GB/T 9113、JB/T 79、ANSI B16.5、ANSI B16.47、HG、JIS、DIN等
主体材料: WCB
密封形式: 硬密封
泄漏量: 无可见泄漏
配套附件: 安装法兰
驱动装置: 手动、伞齿轮、电动等

Nominal Pressure: 1.6~16.0MPa, 150Lb, 300Lb, 400Lb, 600Lb, 900Lb
Nominal Diameter: DN50~700 NPS 2"~28"
Suitable Temperature: -29~+425℃ (The temperature range depends on the shell material and medium property.)
Connecting Flange: GB/T 9113, JB/T 79, ANSI B16.5, ANSI B16.47, HG, JIS, DIN, etc.
Main material: WCB
Seal Type: Metal seat.
Leakage: No visible leakage.
Accessories: Flange
Driving Devices: Handwheel, bevel gear, electric, etc.

角式放料阀系列 (Fb544Y) Angle Type Discharge Valve Series

公称压力: 1.6~10.0MPa、150Lb、300Lb、400Lb、600Lb
公称口径: DN50~700 NPS 2"~28"
适用温度: -29~+425℃ (具体温度范围视壳体材质和介质性质而定)
连接法兰: ANSI B 16.5、GB/T 9113、JB/T 79、HG、SH、JIS、DIN、NF、BS
主体材料: WCB
密封形式: 硬质合金密封、喷涂碳化钨或喷涂镍基合金
泄漏量: 无可见泄漏
配套附件: 安装法兰
驱动装置: 手动、伞齿轮、气动、电动等。

Nominal pressure: 1.6~10.0MPa, 150Lb, 300Lb, 400Lb, 600Lb
Nominal diameter: DN50~700 NPS 2"~28"
Suitable temperature: -29~+425℃ (temperature range subject to the body material and the property of medium)
Connecting flange: ANSI B 16.5, GB/T 9113, JB/T 79, HG, SH, JIS, DIN, NF, BS
Main material: WCB
Seal type: hard alloy sealing, spraying tungsten carbide or spraying nickel based alloys
Leakage: no visible leakage
Accessories: flange
Actuator: handwheel, bevel gear, pneumatic, electric, etc



DISCHARGE VALVE SERIES Y型料浆阀及放料阀系列



角式针型调节料浆阀系列 (TJs44Y) Angle type needle regulating slurry valve series

公称压力: 1.6~16.0MPa、150Lb、300Lb、400Lb、600Lb、900Lb
公称口径: DN50~400 NPS 2"~16"
适用温度: -29~+425℃ (具体温度范围视壳体材质和介质性质而定)
连接法兰: GB/T 9113、JB/T 79、ANSI B16.5、HG、JIS、DIN等
主体材料: WCB
密封形式: 硬密封
泄漏量: 硬密封: D级 (液体 0.1XDN mm³/s)
配套附件: 安装法兰
驱动装置: 手动、伞齿轮、电动等

Nominal Pressure: 1.6~16.0MPa, 150Lb, 300Lb, 400Lb, 600Lb, 900Lb
Nominal Diameter: DN50~400 NPS 2"~16"
Suitable Temperature: -29~+425℃ (The temperature range depends on the shell material and medium property.)
Connecting Flange: GB/T 9113, JB/T 79, ANSI B16.5, HG, JIS, DIN, etc.
Main material: WCB
Seal Type: Metal seat.
Leakage: Metal seat: Grade D (Liquid 0.1XDN mm³/s)
Accessories: Flange
Driving Devices: Handwheel, bevel gear, electric, etc.

特种长杆放料阀系列 (Ft44Y) Special long stem discharge valve series

公称压力: 1.0~2.5MPa、150Lb
公称口径: DN150~300 NPS 6"~12"
适用温度: -29~+425℃ (具体温度范围视壳体材质和介质性质而定)
连接法兰: GB/T 9113、JB/T 79、ANSI B16.5、HG、JIS、DIN等
主体材料: WCB
密封形式: 硬密封
泄漏量: 无可见泄漏
配套附件: 安装法兰
驱动装置: 手动、气动、电动等

Nominal Pressure: 1.0~2.5MPa, 150Lb
Nominal Diameter: DN150~300 NPS 6"~12"
Suitable Temperature: -29~+425℃ (The temperature range depends on the shell material and medium property.)
Connecting Flange: GB/T 9113, JB/T 79, ANSI B16.5, HG, JIS, DIN, etc.
Main material: WCB
Seal Type: Metal seat.
Leakage: No visible leakage.
Accessories: Flange
Driving Devices: Handwheel, pneumatic, electric, etc.



In 2018, After this year's tempering, our strategy has become more focused and clear-cut. Under the leadership of the chairman and the tenacious and enterprising, the growth of all major indicators has once again reached the best level in history. The sales revenue increased by 38% compared with the previous year. The tax revenue exceeded RMB 10 million, and it was listed in the "Invisible Champion" cultivation enterprise in Zhejiang Province. It obtained two invention patents, "A Balance Valve Built Into The Buffer Function" and "Water Volume Control Valve" and three utility model patents. And awarded the DRAGON ENTERPRISE, HIGH GROWTH ENTERPRISE, LEADING ENTERPRISE in Yongjia County. The chairman was awarded as Outstanding Entrepreneur in Yongjia County, and the corporate credit rating was maintained as "AAA", and passed the Corporate Credit of Sinopec.



DISCHARGE VALVE SERIES Y型料浆阀及放料阀系列

手动上展式放料阀系列 (HG5-81-1) Manual Upward Expanded Dumping Valve Series



公称压力: 1.0MPa、1.6MPa、2.5MPa、4.0MPa、6.4MPa、150Lb、300Lb
 公称口径: DN50~400 NPS 2"~16"
 适用温度: -29~+540℃ (具体温度范围视壳体材质和介质性质而定)
 连接法兰: GB/T 9113、JB/T 79、ANSI B 16.5、HG、JIS、DIN等
 主体材料: WCB、ZG0Cr18Ni90、ZG1Cr18Ni12Mo2Ti、CF8、CF8M、CF3、CF3M等
 密封形式: 硬密封
 泄漏量: 无可见泄漏
 配套附件: 安装法兰
 驱动装置: 手动、伞齿轮、气动、电动等。

Nominal pressure: 1.0MPa、1.6MPa、2.5MPa、4.0MPa、6.4MPa、150Lb、300Lb
 Nominal diameter: DN50~400 NPS 2"~16"
 Suitable temperature: -29~+540℃ (temperature range subject to the body material and the property of medium)
 Connecting flange: GB/T 9113、JB/T 79、ANSI B 16.5、HG、JIS、DIN, etc.
 Main material: WCB、ZG0Cr18Ni90、ZG1Cr18Ni12Mo2Ti、CF8、CF8M、CF3、CF3M, etc.
 Seal type: metal seat
 Leakage: no visible leakage
 Accessories: flange
 Actuator: handwheel, bevel gear, pneumatic, electric, etc

手动下展式放料阀系列 (HG5-81-2) Manual Downward Expanded Dumping Valve Series

公称压力: 1.0MPa、1.6MPa、2.5MPa、4.0MPa、6.4MPa、150Lb、300Lb
 公称口径: DN50~400 NPS 2"~16"
 适用温度: -29~+540℃ (具体温度范围视壳体材质和介质性质而定)
 连接法兰: GB/T 9113、JB/T 79、ANSI B16.5、HG、JIS、DIN等
 主体材料: WCB、ZG0Cr18Ni9、ZG1Cr18Ni12Mo2Ti、CF8、CF8M、CF3、CF3M等
 密封形式: 硬密封
 泄漏量: 无可见泄漏
 配套附件: 安装法兰
 驱动装置: 手动、伞齿轮、气动、电动等。

Nominal pressure: 1.0MPa、1.6MPa、2.5MPa、4.0MPa、6.4MPa、150Lb、300Lb
 Nominal diameter: DN50~400 NPS 2"~16"
 Suitable temperature: -29~+540℃ (temperature range subject to the body material and the property of medium)
 Connecting flange: GB/T 9113、JB/T 79、ANSI B 16.5、HG、JIS、DIN, etc.
 Main material: WCB、ZG0Cr18Ni90、ZG1Cr18Ni12Mo2Ti、CF8、CF8M、CF3、CF3M, etc.
 Seal type: metal seat
 Leakage: no visible leakage
 Accessories: flange
 Actuator: handwheel, bevel gear, pneumatic, electric, etc



BALL VALVE SERIES

球阀系列

立足阀门市场 信守质量承诺
 Integrity Let Us Root In The Valve World

在瓯北安康路获得一块新的工业用地，并挂牌，于11月份开始进入现场施工；
 通过了《特种设备许可证（TS）》的复审和增项；通过高新技术企业复审；取得中石化易派客“中压阀门”六种11个项目的产品质量认证；
 取得球阀、蝶阀、旋塞阀三大系列共计25种规格的防火认证；中得中石化的“球阀”、“蝶阀”、“旋塞阀”和“节流放空阀”系列的年度框架标；
 取得发明专利三项，实用新型专利五项；启动智能化生产车间改造项目；第八年被评为永嘉县《巨龙企业》。



BALL VALVE SERIES 球阀系列

锻钢浮动球阀系列 (Q41F) Forged Floating Ball Valve Series



公称压力: 1.6MPa~10.0MPa、150Lb、300Lb、600Lb
公称口径: DN15~250 NPS 1/2"~10"
适用温度: -29~+180℃
连接法兰: GB/T 9113、JB/T 79、ANSI B 16.5、HG、JIS、DIN等
主体材料: A105、LF2、F304、F316等
密封形式: 软密封
泄漏量: A级(零泄漏)
配套附件: 安装法兰
驱动装置: 手动、蜗轮、气动、电动等。

Nominal pressure: 1.6MPa~10.0MPa、150Lb、300Lb、600Lb
Nominal diameter: DN15~250 NPS 1/2"~10"
Suitable temperature: -29~+180℃
Connecting flange: GB/T 9113、JB/T 79、ANSI B 16.5、HG、JIS、DIN, etc.
Main material: A105、LF2、F304、F316, etc.
Seal type: soft seat
Leakage: class A (zero leakage)
Accessories: flange
Actuator: handwheel, worm gear, pneumatic, electric, etc

固定球阀系列 (Q47F) Trunnion Ball Valve Series

公称压力: 1.6MPa~42.0MPa、150Lb、300Lb、600Lb、900Lb、1500Lb、2500Lb
公称口径: DN50~600 NPS 2"~24"
适用温度: -29~+180℃
连接法兰: GB/T 9113、JB/T 79、ANSI B 16.5、HG、JIS、DIN等
主体材料: WCB、CF8、CF8M、CF3、CF3M等
密封形式: 软密封
泄漏量: A级(零泄漏)
配套附件: 安装法兰
驱动装置: 手动、蜗轮、气动、电动等。

Nominal pressure: 1.6MPa~42.0MPa、150Lb、300Lb、600Lb、900Lb、1500Lb、2500Lb
Nominal diameter: DN50~600 NPS 2"~24"
Suitable temperature: -29~+180℃
Connecting flange: GB/T 9113、JB/T 79、ANSI B 16.5、HG、JIS、DIN, etc.
Main material: WCB、CF8、CF8M、CF3、CF3M, etc.
Seal type: soft seat
Leakage: class A (zero leakage)
Accessories: flange
Actuator: handwheel, worm gear, pneumatic, electric, etc



BALL VALVE SERIES 球阀系列

对夹气动V型球阀系列 (QV671Y) Wafer Pneumatic V-type Ball Valve Series



公称压力: 1.0~6.4MPa 150Lb、300Lb
公称口径: DN25~600 NPS 1"~24"
连接形式: DN25~DN250(对夹式)
温度范围: -29~160℃(常温) -29~230℃(中温) -29~425℃(高温)
流量特性: 近似等百分比
气源压力: 0.5~0.7MPa
阀座形式: 金属可动硬密封、PTFE软密封
气动执行器: GT系列精小型双活塞铝合金气动执行器
主要材质: 阀体: WCB、CF8、CF8M、CF3、CF3M等 阀芯: 304、316、316L等
可选附件: 1)电气阀门定位器:A进口 B国产 2)电磁阀、回讯器 3)配对法兰、紧固件

Nominal pressure: 1.0~6.4MPa 150Lb、300Lb
Nominal diameter: DN25~600 NPS 1"~24"
End connection type: DN25~DN250(wafer)
Temperature range: -29~160℃(normal temperature) -29~230℃(middle temperature) -29~425℃(high temperature)
Flow characteristics: approximate to equal percentage
Air supply pressure: 0.5~0.7MPa
Seat type: self-adjusting metal seat、PTFE soft seat
Pneumatic actuator: GT series mini type double piston aluminum alloy pneumatic actuator
Main material: body: WCB、CF8、CF8M、CF3、CF3M, etc. trim: 304、316、316L, etc.
Optional accessories: 1)Positioner: A.imported B.home-made 2)solenoid valve、limit switch 3)mating flange、fasteners

法兰气动V型球阀系列 (QV647Y) Flange Pneumatic V-type Ball Valve Series

公称压力: 1.0~6.4MPa 150Lb、300Lb
公称口径: DN25~600 NPS 1"~24"
连接形式: DN25~DN600(法兰式)
温度范围: -29~160℃(常温) -29~230℃(中温) -29~425℃(高温)
流量特性: 近似等百分比
气源压力: 0.5~0.7MPa
阀座形式: 金属可动硬密封、PTFE软密封
气动执行器: ZXQ系列单活塞气动执行器
主要材质: 阀体: WCB、CF8、CF8M、CF3、CF3M等 阀芯: 304、316、316L等
可选附件: 1)电气阀门定位器:A进口 B国产 2)电磁阀、回讯器 3)配对法兰、紧固件

Nominal pressure: 1.0~6.4MPa 150Lb、300Lb
Nominal diameter: DN25~600 NPS 1"~24"
End connection type: DN25~DN600(flange)
Temperature range: -29~160℃(normal temperature) -29~230℃(middle temperature) -29~425℃(high temperature)
Flow characteristics: approximate to equal percentage
Air supply pressure: 0.5~0.7MPa
Seat type: self-adjusting metal seat、PTFE soft seat
Pneumatic actuator: ZXQ series single piston pneumatic actuator
Main material: body: WCB、CF8、CF8M、CF3、CF3M, etc. trim: 304、316、316L, etc.
Optional accessories: 1)Positioner: A.imported B.home-made 2)solenoid valve、limit switch 3)mating flange、fasteners



Lixin had acquired a piece of new industrial land and registered on Ankang Road of Oubei, starting the construction on site in November. We had passed the review and addition of "Special Equipment License (TS)"; Passed the review of high-tech enterprises; Obtained the product quality certification of 11 items of 6 kinds of "medium pressure valve" of Sinopec Epac. We had obtained the fire protection certification for total 25 types of specifications in the three series such as ball valve, butterfly valve and plug valve; Won the Sinopec's annual framework bidding for "Ball valve, Butterfly valve, Plug valve and Throttle vent valve Series"; We had achieved three invention patents and five utility model patents; Started the transformation project of intelligent production workshop; and was named "Dragon Enterprise" of Yongjia County for the eighth year.



BALL VALVE SERIES 球阀系列



偏心半球阀系列 (PBQ40H/V) Eccentric Hemispherical Valve Series

公称压力: 0.25MPa~10.0MPa、150Lb、300Lb、600Lb
公称口径: DN40~2000 NPS 1-1/2"~80"
适用温度: -29~+300°C (具体温度范围视壳体材质和介质性质而定)
连接法兰: GB/T 9113、GB/T 17241.6、JB/T 79、ANSI B 16.5、ANSI B16.47、HG、JIS、DIN等
主体材料: C.I、WCB、CF8、CF8M、CF3、CF3M等
密封形式: 硬密封、软密封
泄 漏 量: 硬密封: D级 (液体0.1XDN mm³/s) 软密封: A级(零泄漏)
配套附件: 安装法兰
驱动装置: 手动、蜗轮、气动、电动等。

Nominal pressure: 0.25MPa~10.0MPa、150Lb、300Lb、600Lb
Nominal diameter: DN40~2000 NPS 1-1/2"~80"
Suitable temperature: -29~+300°C (temperature range subject to the body material and the property of medium)
Connecting flange: GB/T 9113、GB/T 17241.6、JB/T 79、ANSI B 16.5、ANSI B16.47、HG、JIS、DIN, etc.
Main material: C.I、WCB、CF8、CF8M、CF3、CF3M etc.
Seal type: metal seat, soft seat
Leakage: metal seat: class D(liquid 0.1XDN mm³/s) soft seat: class A(zero leakage)
Accessories: flange
Actuator: handwheel, worml gear, pneumatic, electric, etc.

内螺纹球阀系列 (Q11F) Female Screw Ball Valve Series

公称压力: 1.0~32.0MPa 150Lb、300Lb、600Lb、800Lb、900Lb、1500Lb
公称口径: NPS 1/2"~4" DN10~100 NPS 3/8"~4"
适用温度: -29~+180°C (具体温度范围视主体材质和介质性质而定)
端部连接形式: G、NPT、BSP等 /SW、BW
主体材料: WCB、A105、CF8、CF8M、CF3、CF3M等
密封形式: 软密封
泄 漏 量: 零泄漏
驱动装置: 手动、气动、电动等。

Nominal pressure: 1.0~32.0MPa 150Lb、300Lb、600Lb、800Lb、900Lb、1500Lb
Nominal diameter: NPS 1/2"~4" DN10~100 NPS 3/8"~4"
Suitable temperature: -29~+180°C (temperature range subject to the body material and the property of medium)
End connection type: G、NPT、BSP, etc. /SW、BW
Main material: WCB、A105、CF8、CF8M、CF3、CF3M, etc.
Seal type: soft seat
Leakage: zero leakage
Actuator: handle, pneumatic, electric, etc.

焊接球阀系列 (Q61F) Weld Ball Valve Series



Q11F



Q61F

STAINLESS STEEL VALVES SERIES

不锈钢阀门系列

立足阀门市场 信守质量承诺
Integrity Let Us Root In The Valve World

安康路新厂房建设按期竣工; 并通过美国石油学会API 6D、600、602认证;
5种阀门经TUV认证通过ISO15848-1试验, 闸阀、截止阀经TUV认证通过API 624标准试验;
建立阀门检测中心; 并获得发明专利四项, 实用新型专利五项; 取得《中石化易派客平台》法人认证。



STAINLESS STEEL VALVES SERIES 不锈钢阀门系列

不锈钢球阀系列 (Q41F) Stainless Steel Ball Valve Series



压力等级: 150Lb、300Lb、600Lb、1.6MPa、2.5MPa、4.0MPa、6.4MPa

公称通径: NPS1/2"~12"

适用温度: -30~180℃

连接法兰: ANSI B16.5

主体材料: CF8、CF8M、CF3、CF3M等

密封形式: 软密封

泄漏量: 零泄漏

配套附件: 配对法兰

Nominal pressure: 150Lb、300Lb、600Lb、1.6MPa、2.5MPa、4.0MPa、6.4MPa

Nominal diameter: NPS1/2"~12"

Suitable temperature: -30~180℃

Connecting flange: ANSI B 16.5

Main material: CF8、CF8M、CF3、CF3M, etc.

Seal type: soft seat

Leakage: zero leakage

Accessories: flange

手动不锈钢闸阀系列 (Z40W) Stainless Steel Manual Gate Valve Series

压力等级: 150Lb、300Lb、600Lb、1.6MPa、2.5MPa、4.0MPa、6.4MPa

公称通径: NPS1/2"~24"

适用温度: -30~540℃(具体温度范围视介质性质而定)

连接法兰: ANSI B16.5

主体材料: CF8、CF8M、CF3、CF3M等

密封形式: 硬密封

泄漏量: 无可见泄漏

配套附件: 配对法兰

Nominal pressure: 150Lb、300Lb、600Lb、1.6MPa、2.5MPa、4.0MPa、6.4MPa

Nominal diameter: NPS1/2"~24"

Suitable temperature: -30~540℃ (temperature range subject to the property of medium)

Connecting flange: ANSI B16.5

Main material: CF8、CF8M、CF3、CF3M, etc.

Seal type: metal seat

Leakage: no visible leakage

Accessories: flange



STAINLESS STEEL VALVES SERIES 不锈钢阀门系列

手动不锈钢截止阀系列 (J41W) Stainless Steel Manual Globe Valve Series



压力等级: 150Lb、300Lb、600Lb、1.6MPa、2.5MPa、4.0MPa、6.4MPa

公称通径: NPS1/2"~16"

适用温度: -30~540℃(具体温度范围视介质性质而定)

连接法兰: ANSI B16.5

主体材料: CF8、CF8M、CF3、CF3M等

密封形式: 硬密封

泄漏量: 无可见泄漏

配套附件: 配对法兰

Nominal pressure: 150Lb、300Lb、600Lb、1.6MPa、2.5MPa、4.0MPa、6.4MPa

Nominal diameter: NPS1/2"~16"

Suitable temperature: -30~540℃ (temperature range subject to the property of medium)

Connecting flange: ANSI B16.5

Main material: CF8、CF8M、CF3、CF3M, etc.

Seal type: metal seat

Leakage: no visible leakage

Accessories: flange

不锈钢止回阀系列 (H41W H42W H44W) Stainless Steel Swing Type Check Valve Series

压力等级: 150Lb、300Lb、600Lb、1.6MPa、2.5MPa、4.0MPa、6.4MPa

公称通径: NPS1/2"~36"

适用温度: -30~540℃(具体温度范围视介质性质而定)

连接法兰: ANSI B16.5、ANSI B16.47

主体材料: CF8、CF8M、CF3、CF3M等

密封形式: 硬密封

泄漏量: 无可见泄漏

配套附件: 配对法兰

Nominal pressure: 150Lb、300Lb、600Lb、1.6MPa、2.5MPa、4.0MPa、6.4MPa

Nominal diameter: NPS1/2"~36"

Suitable temperature: -30~540℃ (temperature range subject to the property of medium)

Connecting flange: ANSI B16.5、ANSI B16.47

Main material: CF8、CF8M、CF3、CF3M, etc.

Seal type: metal seat

Leakage: no visible leakage

Accessories: flange



The construction of the new plant on Aankang Road was completed on schedule, and we passed the American Petroleum Institute certification such as API6D, API600 and API602. Five kinds of valves had passed ISO15848-1 test which certified by TUV. Gate valves and globe valves had passed API 624 standard test which certified by TUV. Established a valve testing center, and obtained four invention patents, five utility model patents; Achieved the legal person certification of "Sinopec Epay Platform".



SOCIAL RESPONSIBILITY

社会责任

在立信，社会责任与良好的企业公民形象意味着——尊重、负责、诚信与法律遵从以及与社会、环境的和谐共生和可持续发展。

/尊重

尊重员工，为他们竞争力的提升和快乐工作而投资，并为他们的贡献给予合理回报。

/负责

关注客户的需求，不断地为客户创造价值。不断追求公司经营结果的改进，为股东带来长期良好的回报。

/诚信与法律遵从

诚信是立信事业长期和可持续发展的基础，是公司价值观的重要组成部分。立信要以高标准的道德规范和法律标准以及公司治理原则来要求公司的行为，承担社会责任，并得到社会的尊重。

/和谐共生与可持续发展

关注社会弱势群体、履行企业的社会责任。保护环境、绿色发展，构建共赢的产业生态系统，追求企业成长与社会的和谐和可持续发展。

LIXIN, social responsibility and good corporate citizenship means – Respect, responsibility, integrity and legal compliance as well as social harmony and environmental sustainability.

/Respect

Respect for employees, investing in improving the competitive ability of staff and happy work. And give a reasonable return for their contributions.

/Responsible

Attention to customer needs, continue to create value for customers. Continuous improvement, for shareholders long-term good return.

/ Integrity and legal compliance

Integrity is the foundation of long-term and sustainable development, is an important part of the company's values. LIXIN have high standards of ethical, legal standards and corporate governance principles to require company's behavior, undertake the social responsibility and get the respect of the society.

/ Harmony and sustainable development

Attention to vulnerable groups in society, to fulfill corporate social responsibility. Protect the environment, green development and build a win-win industrial ecosystem, to pursuit corporate growth and harmonious and sustainable development of society.



LETTER OF GUARANTEE OF AFTER-SALES SERVICE

售后服务承诺书

为了提供更优质的产品给用户，我公司在技术支持和售后服务方面，建立企业诚信价值体系，使公司的产品无论在技术、质量和服务方面都是最优的，公司通过了一系列的认证如ISO 9001、API 6D、CE、特种设备制造许可证等等，为此企业向用户承诺会做到下列几点（如果用户提出合理的要求我公司也会按要求执行）：

- ① 我公司负责所提供设备的现场安装指导、调试及操作人员培训。
- ② 我公司负责现场调试安装需要的特殊工具和消耗品。
- ③ 当业主通知投产运行时要求我公司派人员进行现场监督运行，我公司派有经验的工程师检查安装，并监督试运和运行工作。
- ④ 长期免费提供24小时的技术支持热线。
- ⑤ 阀门的质量免费保证期为货到货到后12个月，在质量保质期内，若发现我公司提供的阀门有任何质量或功能问题，我公司免费进行更换和维修。当设备出现故障或不能满足业主要求时，我公司按照业主要求排除故障，直到业主满意为止。
- ⑥ 质量保证期结束后，我方保证长期提供技术服务，费用由我方按成本收取。若出现任何质量问题，我方在接到用户通知后72小时内，派有经验的工程师到达现场进行服务。
- ⑦ 质量保证期内的技术服务费用由我公司自己承担，质量保证期结束后的技术服务费用我公司收取一定的差旅费。

To provide products of higher quality for customers, our company has established enterprise sincerity value system in the aspects of technical support and after-sales service, so as to make our products the most excellent in technology, quality and service. The company has passed series of certifications such as ISO 9001, API 6D, CE and manufacturing license for special equipment etc. For this reason, our company promises to abide by the following items (our company will also follow any reasonable requirements brought forward by users):

- ① Our company will be responsible for providing site installation guide, debugging and trainings to operators for the equipment offered.
- ② Our company will provide special tools and wearing parts necessary for site installation.
- ③ Upon user's notification of putting into operation, our company will dispatch personnel to supervise the operation on site. The experienced engineer dispatched by our company will check the installation and supervise the trial operation and running.
- ④ We will always provide 24-hour hotline for technical support.
- ⑤ The warranty period of our valves is 12 months after the arrival of goods. During the warranty period, if any quality or function problem is found in the valve offered by us, our company will make replacement and maintenance free of charge. If the any malfunction occurs in the equipment or user's requirements can't be satisfied, our company will eliminate the malfunction according to user's requirements until full satisfaction is gained from the user.
- ⑥ After the warranty period expires, our company promises to always provide technical service and we will receive charge according to the real cost. If there is any quality problem, within 72 hours upon receiving user's notification of it, our company will dispatch the experienced engineer to arrive at the site for service.
- ⑦ The technical service costs incurred during the warranty period will be covered by our company, and a certain expenses for business travel will be charged by our company for those incurred after the warranty period expires.



高新技术企业
巨龙企业